

HYUNDAI
CONSTRUCTION EQUIPMENT

R55w-9A **V** STAGE

HYUNDAI CONSTRUCTION EQUIPMENT EUROPE



MOVING YOU **FURTHER**

PRIDE AT WORK

Hyundai Heavy Industries strives to build state-of-the-art earthmoving equipment to give every operator maximum performance, optimal controllability, versatile machine settings and proven technology.

Be proud of your work with Hyundai!

R55w-9A

Machine Walk-Around

Engine Technology

The fuel efficient, Yanmar 4TNV98 engine, which meets the strictest European Stage V emission regulations, provides proven, reliable power. This engine is electronically controlled for optimum fuel to air ratio and clean, efficient combustion and provides low noise, anti-restart features.

Efficient Control System

All control devices are arranged for higher productivity and improved operator comfort. Efficient and ergonomic controls allow an operator to control the machine in any working environment. A safety lever on the left-side console is provided to prevent exiting the cabin while hydraulic controls are live.

Advanced Hydraulic System

The R55W-9A's advanced hydraulic system includes an arm flow summation system, boom holding system and a swing parking brake for smooth and fine control. Other valuable features include a hydraulic damper in the travel pedal, and a hydraulically lubricated swing reducer with a leak-free grease chamber.

Comfortable and Durable Cabin

The cabin is roomy and ergonomically designed, for reduced noise and good visibility. The cabin frame meets international standard TOPS, ROPS, FOPS ensuring operator safety.

Operator Convenience

Convenient operator features include a suspension seat, excellent visibility, and variable storage space for advanced operator comfort. The newly designed LED cluster provides current information, including engine RPM, engine coolant, fuel level, and electric components. A hydraulic function safety lock and auto diagnostic features are also available. Lock and failure diagnosis functions are also integrated. A powerful air conditioning system and Radio & USB player contribute to a productive work environment.

Easy and Simple Maintenance

Wide open access of doors, covers, hoods is designed for easier maintenance. The air cleaner and centralized grease fittings are also integrated for easy service.

Extended Life of Components

Long life components and wear parts, including hydraulic filters, oil, shims and bushings, help to reduce operating costs.



*Photo may include optional equipment.

PREFERENCE


An operator, who sets his machine to his needs, takes pleasure in his work. Operators can fully customize their work environment and operating preferences to fit their individual needs.

R55W-9A

Operator Comfort

In the cabin of our R55W-9A you can experience the highest level of comfort. The ergonomic location of joysticks with arm rests, suspension seat, control levers and LED-display minimizes fatigue of the operator. The LED-display shows all information of the machine with a blink of an eye.


1. A large top glass combined with a roll-up sun visor offers high visibility.
2. An advanced audio system with radio / MP3-player with USB-input, combined with a remote control is installed to listen to your preferred music favorites.
3. Operators are able to call while operating with the hands-free mobile phone feature.
4. Ergonomically designed joysticks reduce operator fatigue.
5. Cabin provides various storage compartments for operator's convenience.

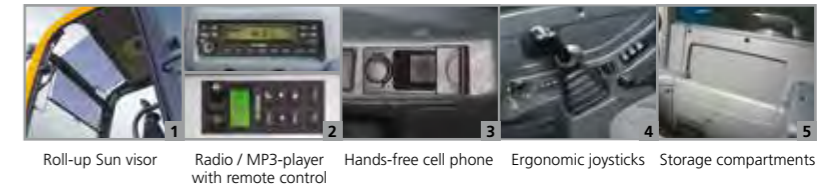

Stressless

Work is stressful enough; your working environment should be stressless. Hyundai's R55W-9A compact excavator provides many convenient devices for safe and productive work.

1. The window locking device keeps the right window in the preferred position.
2. The sliding front window is easy to open and can be locked safely in open position to improve ventilation and visibility.
3. The tiltable left-side console box offers easy access to the cabin.
4. The powerful temperature control provides the operator with the preferred air temperature.

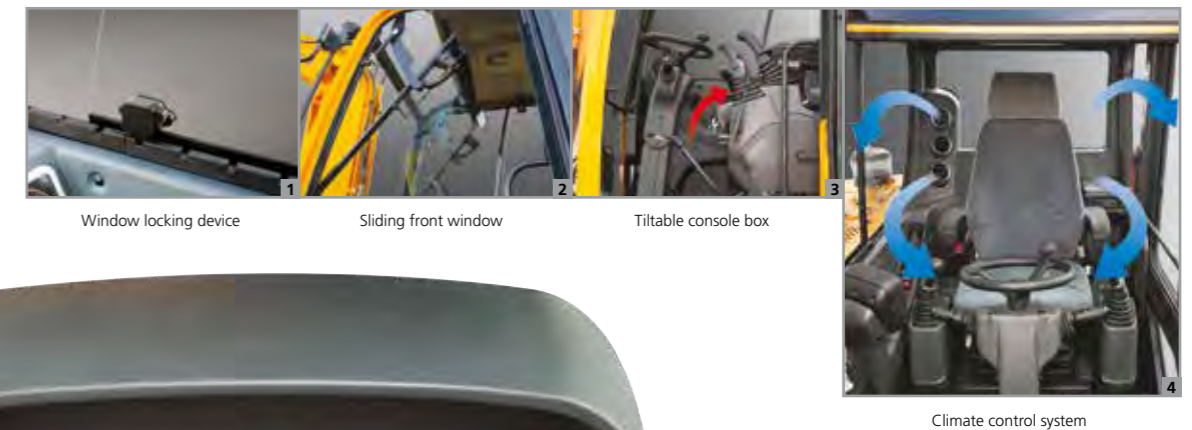

*Photo may include optional equipment.



Spacious Cabin with Excellent Visibility

The newly designed cabin was conceived for more space, a wider field of view and operator comfort. Special attention was given to a clear, open and convenient interior with plenty of visibility on the machine surroundings and the job at hand. This well balanced combination of precision aspects put the operator in the perfect position to work safely and securely.



Easy-to-use Cluster

The advanced LED-cluster allows the operator to select his personal machine preferences. The monitor displays engine rpm, engine temperature and state of electronic devices. The operator can select auto deceleration mode and max power mode and he can control travel speed with the touch of a button. An engine starting lock prevents theft of the machine.

PERFORMANCE

9A Series deliver fast precision by combining smoother hydraulics with wider view and less stress. Innovative hydraulic system technologies make the R55W-9A excavator fast, smooth and easy to control.



*Photo may include optional equipment.

R55W-9A

Excellent Performance

Hyundai's 9A series offer maximum productivity and high efficiency. With the engine dial, the operator can adjust the engine power to the specific application. A max power button maximizes machine speed and power for maximum productivity. R55W-9A features auto deceleration to reduce fuel consumption and cabin noise level.


Improved Hydraulic System



To achieve optimum precision, Hyundai redesigned the hydraulic system to provide the operator with super fine touch and high controllability. Improved pump flow control reduces hydraulic flow when controls are not activated to minimize fuel consumption. Improved spool valves in the main control valve are engineered to provide more precise flow to each function with less effort. Improved hydraulic valves, precise variable volume piston pumps, fine-touch pilot controls and enhanced travel functions make any operator of our 9A series look like a smooth operator. Additional features include arm and boom regeneration, combined with automatic boom vs. swing priority for optimal performance in any application.

Offset Boom

The R55W-9A's boom offset function is designed for efficient work in congested residential and urban areas. The boom can be offset from 80° to the left up to 50° to the right. Increased swing torque provides better operating capability on a slope.

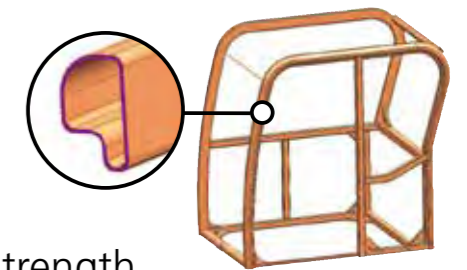

Structural Strength

The 9A Series cabin structure is designed with slimmer but stronger tubing for more safety and better visibility. Low-stress and high strength steel is welded to form a strong and stable lower frame. Structural durability is analyzed and tested by FEM-analysis (Finite Elements Method) and long-term durability tests.



Yanmar 4TNV98



The stage V Yanmar engine provides a nominal power of 66.9 HP at 2,400 rpm. This means the R55W-9A runs with the most power in its class, giving you more power to get the job done.

PROFITABILITY

9A series machines are designed to maximize profitability through improved fuel efficiency, enhanced service features and long-lasting components.




*Photo may include optional equipment.

R55W-9A

Fuel Efficient

9A series compact excavators are engineered to be very fuel efficient.



Improved Durability

The R55W-9A is equipped with side protection of the counterweight to protect the engine hood. A cover of the dozer cylinder provides extra protection in tough working conditions.




Easy Maintenance

Centralized grease fittings and easy to change air filter provide faster and easier maintenance.

Large Engine hood

9A series compact excavator are offering easy access to the engine compartment with a large engine hood.

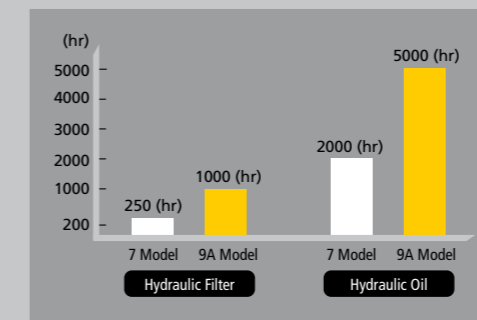

Extended Life of Components

By adopting long-life hydraulic filters (1000 hrs) and long-life hydraulic oil (5000 hrs) operation costs are reduced. Extended lubricant bush life & ultra high molecular weight polymer shim, more efficient cooling systems and integrated preheating systems are extending service intervals and reducing machine down time.

SPECIFICATIONS

R55W-9A

ENGINE

| | | | |
|----------------------------|--|----------------|-------------------------------|
| MODEL | YANMAR 4TNV98 | | |
| Type | Water cooled, 4 cycle Diesel, 4-Cylinders in line, direct injection and low emission stage V compliant | | |
| Rated flywheel horse power | SAE | J1995 (gross) | 66.9 HP (49.9 kW) / 2,400 rpm |
| | | J1349 (net) | 65.1 HP (48.5 kW) / 2,400 rpm |
| | DIN | 6271/1 (gross) | 67.8 PS (49.9 kW) / 2,400 rpm |
| | | 6271/1 (net) | 66 PS (48.5 kW) / 2,400 rpm |
| Max. torque | 24 kgf.m (174 lbf.ft) / 1,560 rpm | | |
| Bore x stroke | 98 mm (3.86") x 110 mm (4.33") | | |
| Piston displacement | 3,319 cc (203 cu in) | | |
| Batteries | 1 x 12 V x 100 Ah | | |
| Starting motor | 12 V - 3.0 kW | | |
| Alternator | 12 V - 80 A | | |

HYDRAULIC SYSTEM

| | |
|---|---|
| MAIN PUMP | |
| Type | Two variable displacement axial piston pumps |
| Max. flow | 2 x 62.5 l/min pumps |
| Sub-pump for pilot circuit | Gear pump |
| Cross-sensing and fuel saving pump system | |
| HYDRAULIC MOTORS | |
| Travel | Two speed axial piston motor with counter balance valve and parking brake |
| Swing | Axial piston motor with automatic brake |
| RELIEF VALVE SETTING | |
| Implement circuits | 220 kgf/cm ² (3,130 psi) |
| Travel | 220 kgf/cm ² (3,130 psi) |
| Swing circuit | 220 kgf/cm ² (3,130 psi) |
| Pilot circuit | 30 kgf/cm ² (430 psi) |
| Service valve | Installed |

HYDRAULIC CYLINDERS

| | |
|---|--|
| No. of cylinder-bore x stroke | Boom: 1-110 x 715 mm (4.3" x 28.1") |
| | Arm: 1-90 x 850 mm (3.5" x 33.5") |
| | Bucket: 1-80 x 660 mm (3.1" x 26.0") |
| | Boom swing: 1-95 x 535 mm (3.7" x 21.1") |
| Dozer blade: 1-110 x 219 mm (4.3" x 8.6") | |

TRAVEL SPEED & GRADEABILITY

| | |
|----------------------------------|--|
| Max. travel speed (high) / (low) | 30 km/h (18.6 mph) / 11.6 km/h (7.2 mph) |
| Gradeability | 35° (70 %) |

CONTROL

Pilot pressure operated joysticks provide almost effortless and fatigueless operation.

| | |
|-----------------|---|
| Pilot control | Two joysticks with one safety lever (LH): Swing and arm (RH): Boom and bucket (ISO) |
| Engine throttle | Electric, Dial type |

SWING SYSTEM

| | |
|---------------------------|--------------------------|
| Swing motor | Axial pistons motor |
| Swing reduction | Planetary gear reduction |
| Swing bearing lubrication | Grease-bathed |
| Swing brake | Multi wet disc |
| Swing speed | 7.8 rpm |

COOLANT & LUBRICANT CAPACITY

| | | | |
|-------------------------|-----------|-----------|-----------|
| Refilling | liter | US gal | UK gal |
| Fuel tank | 120.0 | 31.7 | 26.4 |
| Engine coolant | 9.5 | 2.5 | 2.1 |
| Engine oil | 11.6 | 3.1 | 2.6 |
| Swing device - gear oil | 1.5 | 0.4 | 0.3 |
| Hydraulic system | 120.0 | 31.7 | 26.4 |
| Hydraulic tank | 70.0 | 18.5 | 15.4 |
| Axle (Front / Rear) | 5.3 / 5.3 | 1.4 / 1.4 | 1.2 / 1.2 |

AXLE & TIRES

Full floating front axle is supported by center pin for oscillation.

It can be locked by oscillation lock cylinders.

Rear axle is fixed on the lower chassis.

| | |
|-------|--------------------------|
| Tires | 12.0 x 16.5-12PR, single |
|-------|--------------------------|

DOZER BLADE

Pin-on type dozer blade is standard. Dozer blade is a very useful addition for leveling and back filling or clean-up work.

| | |
|-------------|---|
| Dozer blade | Width x height: 1,925 x 355 mm (6' 4" x 1' 2") |
| | Max. lifting above ground level: 445 mm (17.5") |
| | Max. depth below ground level: 140 mm (5.5") |

OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 3,000 mm (9' 10") boom, 1,600 mm (5' 3") arm, SAE heaped 0.18 m³ (0.24 yd³) bucket, lubricant, coolant, full fuel tank, full hydraulic tank and all standard equipments.

MAJOR COMPONENT WEIGHT

| | |
|-------------------------------|----------------------|
| Upperstructure | 2,680 kg (5,910 lb) |
| Mono boom (with arm cylinder) | 310 kg (680 lb) |

OPERATING WEIGHT

| | |
|------------------|-----------------------|
| Operating weight | 5,550 kg (12,240 lb) |
|------------------|-----------------------|

* Mono boom with blade


BUCKETS R55W-9A

| Capacity m ³ (yd ³) | | Width mm (in) | | Weight kg (lb) |
|---|---|----------------------|-------------------|-----------------|
| | | Without side cutters | With side cutters | |
| SAE heaped | CECE heaped | 315 mm (12.4") | 360 mm (14.2") | 115 kg (255 lb) |
| 0.07 m ³ (0.09 yd ³) | 0.06 m ³ (0.08 yd ³) | 670 mm (26.4") | 740 mm (29.1") | |



SAE heaped m³ (yd³)

0.07 m³ (0.09 yd³)



0.18 m³ (0.24 yd³)

DIGGING FORCE R55W-9A

| | | | |
|----------------------|--------|------------------|------------------|
| Arm | Length | 1,600 mm (5' 3") | 1,900 mm (6' 3") |
| | Weight | 210 kg (460 lb) | 230 kg (510 lb) |
| Bucket digging force | SAE | 37.7 kN | 37.7 kN |
| | | 8,490 lbf | 8,490 lbf |
| | ISO | 42.4 kN | 42.4 kN |
| | | 4,330 kgf | 4,330 kgf |
| Arm crowd force | SAE | 28.4 kN | 25.5 kN |
| | | 2,900 kgf | 2,600 kgf |
| | ISO | 6,390 lbf | 5,730 lbf |
| | | 31.9 kN | 28.7 kN |
| | | 3,260 kgf | 2,930 kgf |
| | | 7,190 lbf | 6,460 lbf |

Arm weight includes cylinder and linkage.

Lifting Capacities

R55W-9A

Rating over-front Rating over-side or 360 degrees

Boom : 3.0 m (9' 10") / Arm : 1.6 m (5' 3") / Bucket : 0.18 m³ (0.24 yd³) SAE heaped / Dozer blade down

| Load point height m (ft) | | Load radius | | | | | | | | At max. reach | | |
|--------------------------|----|--------------|-------|---------------|------|---------------|-------|---------------|------|---------------|-------|--------|
| | | 2.0 m (7 ft) | | 3.0 m (10 ft) | | 4.0 m (13 ft) | | 5.0 m (16 ft) | | Capacity | | |
| | | | | | | | | | | | | |
| 5.0 m (16 ft) | kg | | | | | | | | | *960 | *960 | 4.47 |
| | lb | | | | | | | | | *2120 | *2120 | (14.7) |
| 4.0 m (13 ft) | kg | | | | | *1020 | *1020 | | | *990 | 720 | 5.26 |
| | lb | | | | | *2250 | *2250 | | | *2180 | 1590 | (17.3) |
| 3.0 m (10 ft) | kg | | | | | *1150 | 1120 | *990 | 760 | *1020 | 620 | 5.69 |
| | lb | | | | | *2540 | 2470 | *2180 | 1680 | *2250 | 1370 | (18.7) |
| 2.0 m (7 ft) | kg | | | | | *1900 | 1690 | *1400 | 1070 | *1200 | 740 | 5.86 |
| | lb | | | | | *4190 | 3730 | *3090 | 2360 | *2650 | 1630 | (19.2) |
| 1.0 m (3 ft) | kg | | | | | *2500 | 1580 | *1670 | 1020 | *1310 | 720 | 5.81 |
| | lb | | | | | *5510 | 3480 | *3680 | 2250 | *2890 | 1590 | (19.1) |
| Ground Line | kg | *2690 | *2690 | *2720 | 1530 | *1820 | 990 | *1350 | 700 | *1160 | 620 | 5.51 |
| | lb | *5930 | *5930 | *6000 | 3370 | *4010 | 2180 | *2980 | 1540 | *2560 | 1370 | (18.1) |
| -1.0 m (-3 ft) | kg | *4040 | 3040 | *2610 | 1520 | *1760 | 980 | | | *1180 | 740 | 4.92 |
| | lb | *8910 | 6700 | *5750 | 3350 | *3880 | 2160 | | | *2600 | 1630 | (16.1) |
| -2.0 m (-7 ft) | kg | *3400 | 3100 | *2090 | 1550 | | | | | | | |
| | lb | *7500 | 6830 | *4610 | 3420 | | | | | | | |

- Lifting capacity is based on SAE J1097, ISO 10567.
- Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The load point is a hook located on the back of the bucket.
- (*) indicates the load limited by hydraulic capacity.

R55W-9A

R55W-9A

R55W-9A

Rating over-front Rating over-side or 360 degrees

Boom : 3.0 m (9' 10") / Arm : 1.6 m (5' 3") / Bucket : 0.18 m³ (0.24 yd³) SAE heaped / Dozer blade up

| Load point height m (ft) | | Load radius | | | | | | | | At max. reach | | |
|-----------------------------|----------|----------------|--------------|---------------|--------------|----------------|----------------|---------------|-------------|---------------|-------------|-----------------|
| | | 2.0 m (7 ft) | | 3.0 m (10 ft) | | 4.0 m (13 ft) | | 5.0 m (16 ft) | | Capacity | | Reach m (ft) |
| | | | | | | | | | | | | |
| 5.0 m (16 ft) | kg lb | | | | | | | | | *960 *2120 | 880 1940 | 4.47 (14.7) |
| 4.0 m (13 ft) | kg lb | | | | | *1020 *2250 | *1020 *2250 | | | 760 1680 | 650 1430 | 5.26 (17.3) |
| 3.0 m (10 ft) | kg lb | | | | | *1150 *2540 | 1010 2230 | 810 1790 | 690 1520 | 650 1430 | 550 1210 | 5.69 (18.7) |
| 2.0 m (7 ft) | kg lb | | | 1770 3900 | 1510 3330 | 1130 2490 | 960 2120 | 790 1740 | 670 1480 | 610 1340 | 510 1120 | 5.86 (19.2) |
| 1.0 m (3 ft) | kg lb | | | 1660 3660 | 1410 3110 | 1080 2380 | 910 2010 | 760 1680 | 640 1410 | 610 1340 | 510 1120 | 5.81 (19.1) |
| Ground Line | kg lb | *2690 *5930 | 2630 5800 | 1610 3550 | 1360 3000 | 1040 2290 | 880 1940 | 750 1650 | 630 1390 | 650 1430 | 550 1210 | 5.51 (18.1) |
| -1.0 m (-3 ft) | kg lb | 3210 7080 | 2650 5840 | 1600 3530 | 1350 2980 | 1040 2290 | 870 1920 | | | 790 1740 | 660 1460 | 4.92 (16.1) |
| -2.0 m (-7 ft) | kg lb | 3270 7210 | 2700 5950 | 1630 3590 | 1380 3040 | | | | | | | |

Boom : 3.0 m (9' 10") / Arm : 1.9 m (6' 3") / Bucket : 0.18 m³ (0.24 yd³) SAE heaped / Dozer blade down

| Load point height m (ft) | | Load radius | | | | | | | | At max. reach | | |
|-----------------------------|----------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|-------------|----------------|-------------|-----------------|
| | | 2.0 m (7 ft) | | 3.0 m (10 ft) | | 4.0 m (13 ft) | | 5.0 m (16 ft) | | Capacity | | Reach m (ft) |
| | | | | | | | | | | | | |
| 5.0 m (16 ft) | kg lb | | | | | *940 *2070 | *940 *2070 | | | *880 *1940 | 840 1850 | 4.88 (16.0) |
| 4.0 m (13 ft) | kg lb | | | | | | | | | *910 *2010 | 650 1430 | 5.60 (18.4) |
| 3.0 m (10 ft) | kg lb | | | | | *1010 *2230 | *1010 *2230 | *1010 *2230 | 770 1700 | *940 *2070 | 560 1230 | 6.00 (19.7) |
| 2.0 m (7 ft) | kg lb | *3000 *6610 | *3000 *6610 | *1660 *3660 | *1660 *3660 | *1280 *2820 | 1080 2380 | *1120 *2470 | 750 1650 | *980 *2160 | 520 1150 | 6.16 (20.2) |
| 1.0 m (3 ft) | kg lb | *1940 *4280 | *1940 *4280 | *2330 *5140 | 1590 3510 | *1580 *3480 | 1020 2250 | *1250 *2760 | 720 1590 | *1030 *2270 | 520 1150 | 6.10 (20.0) |
| Ground Line | kg lb | *2520 *5560 | *2520 *5560 | *2670 *5890 | 1520 3350 | *1770 *3900 | 980 2160 | *1330 *2930 | 700 1540 | *1070 *2360 | 560 1230 | 5.83 (19.1) |
| -1.0 m (-3 ft) | kg lb | *3580 *7890 | 3000 6610 | *2660 *5860 | 1500 3310 | *1790 *3950 | 970 2140 | | | *1110 *2450 | 650 1430 | 5.29 (17.4) |
| -2.0 m (-7 ft) | kg lb | *3830 *8440 | 3050 6720 | *2290 *5050 | 1520 3350 | *1490 *3280 | 980 2160 | | | *1080 *2380 | 910 2010 | 4.33 (14.2) |
| -3.0 m (-10 ft) | kg lb | *2070 *4560 | *2070 *4560 | | | | | | | | | |


Boom : 3.0 m (9' 10") / Arm : 1.9 m (6' 3") / Bucket : 0.18 m³ (0.24 yd³) SAE heaped / Dozer blade up

| Load point height m (ft) | | Load radius | | | | | | | | At max. reach | | |
|-----------------------------|----------|----------------|----------------|----------------|--------------|----------------|----------------|---------------|-------------|---------------|-------------|-----------------|
| | | 2.0 m (7 ft) | | 3.0 m (10 ft) | | 4.0 m (13 ft) | | 5.0 m (16 ft) | | Capacity | | Reach m (ft) |
| | | | | | | | | | | | | |
| 5.0 m (16 ft) | kg lb | | | | | *940 *2070 | *940 *2070 | | | *880 *1940 | 760 1680 | 4.88 (16.0) |
| 4.0 m (13 ft) | kg lb | | | | | | | | | 690 1520 | 580 1280 | 5.60 (18.4) |
| 3.0 m (10 ft) | kg lb | | | | | *1010 *2230 | *1010 *2230 | 810 1790 | 690 1520 | 600 1320 | 500 1100 | 6.00 (19.7) |
| 2.0 m (7 ft) | kg lb | *3000 *6610 | 2990 6590 | *1660 *3660 | 1540 3400 | 1140 2510 | 970 2140 | 790 1740 | 670 1480 | 560 1230 | 470 1040 | 6.16 (20.2) |
| 1.0 m (3 ft) | kg lb | *1940 *4280 | *1940 *4280 | 1670 3680 | 1420 3130 | 1080 2380 | 920 2030 | 760 1680 | 640 1410 | 560 1230 | 460 1010 | 6.10 (20.0) |
| Ground Line | kg lb | *2520 *5560 | *2520 *5560 | 1600 3530 | 1350 2980 | 1040 2290 | 880 1940 | 740 1630 | 620 1370 | 590 1300 | 500 1100 | 5.83 (19.1) |
| -1.0 m (-3 ft) | kg lb | 3160 6970 | 2610 5750 | 1580 3480 | 1330 2930 | 1020 2250 | 860 1900 | | | 690 1520 | 580 1280 | 5.29 (17.4) |
| -2.0 m (-7 ft) | kg lb | 3210 7080 | 2650 5840 | 1600 3530 | 1350 2980 | 1040 2290 | 870 1920 | | | 960 2120 | 810 1790 | 4.33 (14.2) |
| -3.0 m (-10 ft) | kg lb | *2070 *4560 | *2070 *4560 | | | | | | | | | |


- Lifting capacity is based on SAE J1097, ISO 10567.
- Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The load point is a hook located on the back of the bucket.
- (*) indicates the load limited by hydraulic capacity.

DIMENSIONS R55W-9A

mm (ft · in)

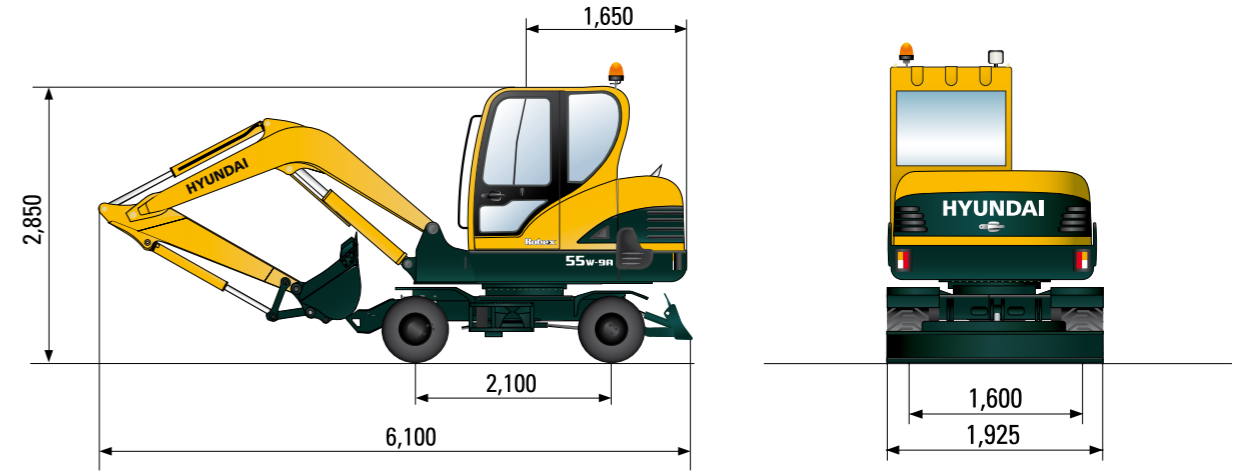

WORKING RANGE R55W-9A

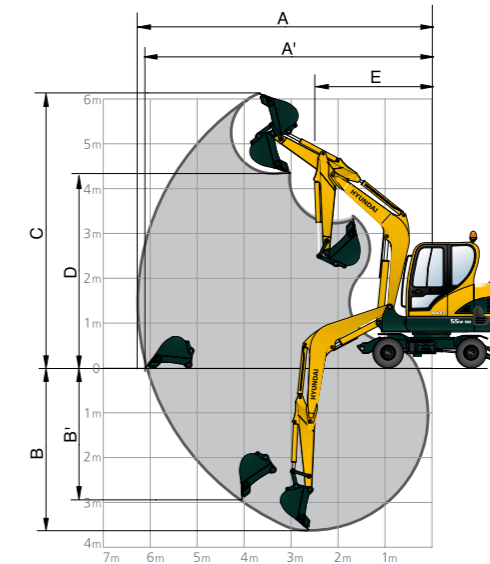

mm (ft · in)

| | | |
|-------------------------------------|-----------------|-----------------|
| Boom length | 3,000 (9' 10") | |
| Arm length | 1,600 (5' 3") | 1,900 (6' 3") |
| A Max. digging reach | 6,150 (20' 2") | 6,430 (21' 1") |
| A' Max. digging reach on ground | 5,980 (19' 7") | 6,200 (20' 4") |
| B Max. digging depth | 3,500 (11' 6") | 3,800 (12' 6") |
| B' Max. vertical wall digging depth | 2,960 (9' 9") | 3,160 (10' 4") |
| C Max. digging height | 6,070 (19' 11") | 6,260 (20' 6") |
| D Max. dumping height | 4,340 (14' 3") | 4,530 (14' 10") |
| E Min. front swing radius | 2,350 (7' 9") | 2,350 (7' 9") |
| F Tail swing radius | 1,650 (5' 5") | 1,650 (5' 5") |

R55w-9A

STANDARD EQUIPMENT R55W-9A

| |
|--|
| ISO standard cabin |
| Cabin ROPS (ISO 3471) |
| FOPS (ISO 3449) |
| FOG (ISO 10262 Level I) |
| TOPS (ISO 12117) |
| All-weather steel cab with all-around visibility |
| Safety glass windows |
| Rise-up type windshield wiper |
| Sliding fold-in front window |
| Sliding side window |
| Lockable door |
| Storage compartment & Ashtray |
| Centralized monitoring |
| Engine speed |
| Gauges |
| - Fuel level gauge |
| - Engine coolant temperature gauge |
| Warning lamps |
| - Fuel level |
| - Engine oil pressure |
| - Engine coolant temperature |
| - Hyd. oil temperature |
| - Low battery |
| - Air cleaner clogging |
| Door and locks, one key fits all |
| Radio / USB Player |
| Two outside rearview mirrors |
| Mechanical suspension seat with heater |
| Console box tilting system (LH.) |
| Front working lights |
| Electric horn |
| Battery (1 x 12 V x 100 Ah) |
| Battery master switch |
| 12 volt power supply |
| Removable clean-out screen for coolers |
| Automatic swing brake |
| Water separator, fuel line |
| Mono boom (3.0 m; 9' 10") |
| Arm (1.6 m; 5' 3") |
| Tires (12.0 x 16.5 - 12PR, single) |
| Dozer blade (1925 x 354 mm; 6'4" x 14") |
| Starting Aid (air grid heater) for cold weather |
| Safety lock valve for boom cylinder with overload warning device |
| Safety lock valve for arm cylinder |
| Safety lock valve for dozer blade cylinder |
| Air conditioner & heater |
| Fuel filler pump (35 ℓ/min) |
| Double acting piping (clamshell, etc) |
| Accumulator, work equipment lowering |

OPTIONAL EQUIPMENT R55W-9A

| |
|---|
| Beacon lamp |
| Single acting piping (Breaker, etc) |
| Quick coupler |
| Long arm (1.9 m; 6'3") |
| Narrow bucket (0.07 m ³ ; 0.09 yd ³) |
| Tool kit |
| Front working lights cabin |

- * Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards.
- * The photos may include attachments and optional equipment that are not available in your area.
- * Materials and specifications are subject to change without advance notice.
- * All imperial measurements rounded off to the nearest pound or inch.
- * The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant HFC-134a (Global Warming Potential = 1430). The system contains 0.95 kg of refrigerant which has a CO₂ equivalent of 1.3585 metric tonne.





Specifications and design are subject to change without notice. Pictures of Hyundai Construction Equipment Europe products may show other than standard equipment.

Hyundai Construction Equipment Europe nv,
Hyundailaan 4, 3980 Tessenderlo, Belgium.
Tel: (32) 14-56-2200 Fax: (32) 14-59-3405

EN - 2021.03 REV/3

**Ready to experience the Hyundai Effect?
Contact your Hyundai dealer.
hyundai-ce.eu/en/dealer-locator**

